



()

2- 4 ÷ 20 mA 500 (H₂O)


HLM-25 HLM-16 -
2- ().
Opposite end of the probe has stainless dismountable cover (HLM).

(. EN 60079-14)


HLM-16N
HLM-25N

	HLM-16N	HLM-25N
	10; 20; 50; 100 H ₂ O	10; 16; 25; 40; 60; 100 H ₂ O
()	-	1; 1,6; 2,5; 4; 6 H ₂ O
: - 1 H ₂ O	10 x	40 x 25 x
	4 ÷ 20 mA	
	10 ÷ 30	
- 1 H ₂ O ()	0,5 %	0,6 %
- 4 H ₂ O ()		0,3 %
- 4 H ₂ O ()		0,2 %
	0,05 %	
	0,1 %	1 H ₂ O
	max. 0,04 % / K	
()	0 25 °C	
- 20 H ₂ O	0 +50 °C	-25 +75 °C
- 20 H ₂ O		-25 +50 °C
	IP 68	
	1.4404 (AISI 316L)	
(U = 24 V)	R _{max} = 675 Ω	
()	c. 0,4 kg	c. 0,6 kg


HLM-25N

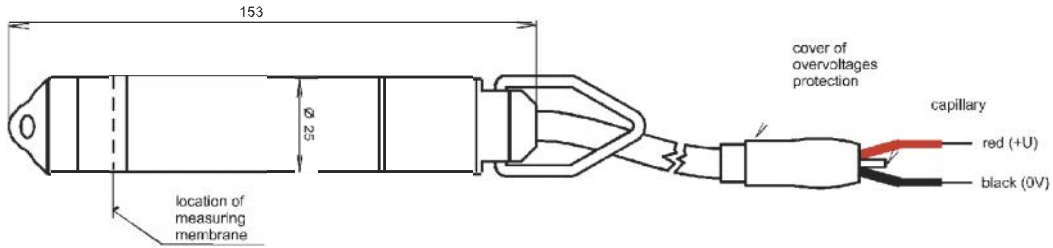



HLM-16N

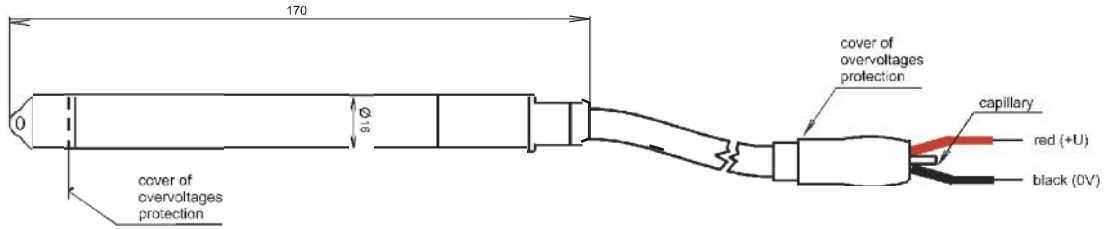

(,) ,
 30
 (39) , () ,



- ():
0100, 0160, 0250, 0400, 0600, 1000
 - ("):
0010, 0016, 0025, 0040, 0060



0100, 0200, 0500, 1000

HLM-25N-0100	25
HLM-25N-0016	5
HLM-16N-0100	25
HLM-16N-0500	70